



Micro-USB charging | Lightweight | 250 lumens

This picture is the intellectual property of Nitecore. All rights to take legal action are reserved



LR10 SPEC.

	HIGH	MID	LOW	CAUTION LIGHT	sos	BEACON
Dutput	250 Lumens	65 Lumens	8 Lumens	250 Lumens	250 Lumens	250 Lumens
Runtime	*1h	5h 15 min	38 h	1	1	/
Beam Diameter	24 m	12 m	3.4 m	1	/	/
Beam Intensity	38 cd	9 cd	0.75 cd	1	/	/
Impact Resistance	1m					
Waterproof	IP66					

NOTE: The stated data has been measured by using a built-in Li-ionbattery (3.7V 1200mAh) under laboratory conditions. End-user results may vary due to individual usage habits and environmental conditions.

* The runtime for HIGH mode is the testing result before starting temperature regulation.

This picture is the intellectual property of Nitecore. All rights to take legal action are reserved

NITECERN

NITECORE®



Features

- Rechargeable pocket camping lantern
- Utilizes 9 high CRI LEDs (CRI≥90, temperature color of 4500k) to emit maximum output of 250 lumens
- Built-in 1200mAh Li-ion battery
- Integrated intelligent charging circuit for Micro-USB charging
- A single switch controls 3 brightness levels and 3 special modes
- Takes advantages of highly translucent PC diffuser, allowing all light source to be well distributed
- Built-in power indicator reports remaining battery power (Patent No. ZL201220057767.4)
- Built-in power indicator doubles as a location signal
- High efficiency constant current circuit
- Magnetic base for multiple scenarios
- Made from durable PC materials
- Waterproof in accordance with IP66
- Impact resistant to 1 meter







High Capacity Li-ion Battery

Built-in a 4.44 Wh Li-ion battery, the capacity is equal to 4 AAA batteries. Maximum runtime up to 38 hours after it is fully charged.







Low Cost and Environmentally Friendly





Reducing pollution caused by discarded Li-ion batteries

One discarded primary battery will pollute one square meter of land.



Micro-USB charging

With a micro-USB charging port, LR10 can be charged easily by various power source. It is convenient to charge it anytime and anywhere.



USB adapter



Power bank



Solar panel



NITECORE F2







Continuous illumination

Intelligent power management system supports continuous illumination even in charging state.





Built-in ultra-thin FPC (Flexible Printed Circuit) with small thermal resistance, can be bended in a narrow space while maximizing heat dissipation surface.






Mini size

Size: 2.58"×1.97"×0.98"

LR10

Weight: 2.08oz



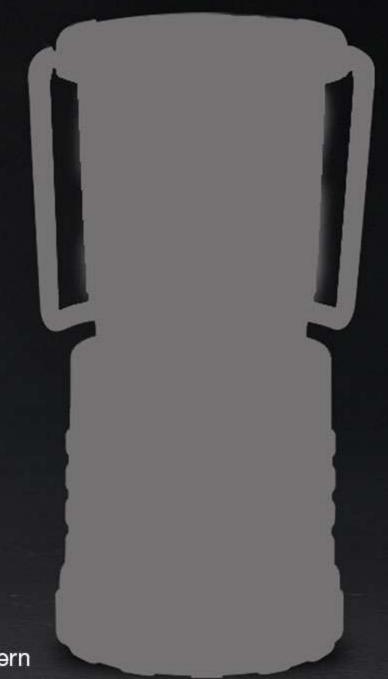


A Common Lantern

This picture is the intellectual property of Nitecore. All rights to take legal action are reserved







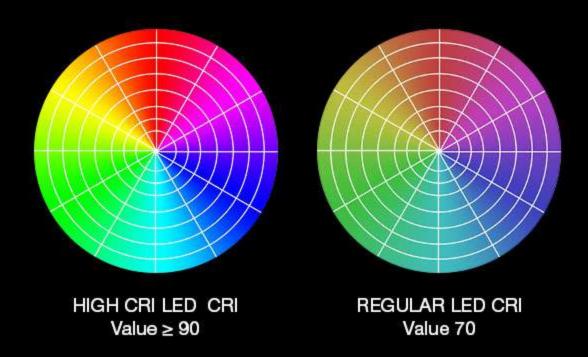

Colour Rendering Index (CRI) describes how a light source makes the colour of and object appear to human eyes and how well subtle variations in colour shades are revealed. CRI is a scale from 0 to 100 indicating how accurate the light source is at rendering colour.

CRI



LR10 utilizes high CRI LEDs (≥ 90) that resembles the nature of morning sunlight, preventing eye fatigue and revealing every subtle detail of an object.





Utilizes high efficient constant circuit (non-PWM) to provide constant illumination and prevent glaring while alleviating visual fatigue.



The LR10 illuminates constantly without flicker.



The common LED light with flicker.












One switch for simple operation

One switch controls 3 brightness levels and 3 special functions. Adjustable and flexible brightness suitable for different scenarios.

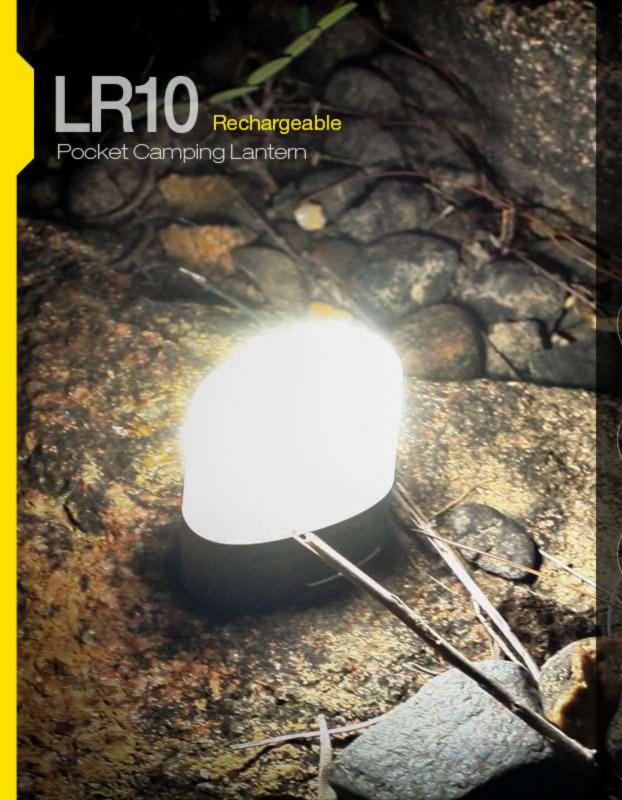



3 special modes



Caution Light

Serves as a warning & emergency light



SOS

An internationally recognized distress signal



Beacon

An ultra-efficient flashing mode to signify locations

This picture is the intellectual property of Nitecore. All rights to take legal action are reserved.







With incorporated Advanced Temperature Regulation module, LR10 regulates its outputs and adapts to the ambient environment, therefore maintaining optimal performance.





Ideal for multiple scenarios

Easily cope with emergency in outdoor, power failure or natural disaster.



Metal Loop



Magnetic Base





IP66 RATING

1meters impact resistance

This picture is the intellectual property of Nitecore. All rights to take legal action are reserved.



PACKING LIST

- LR10
- USB cable

